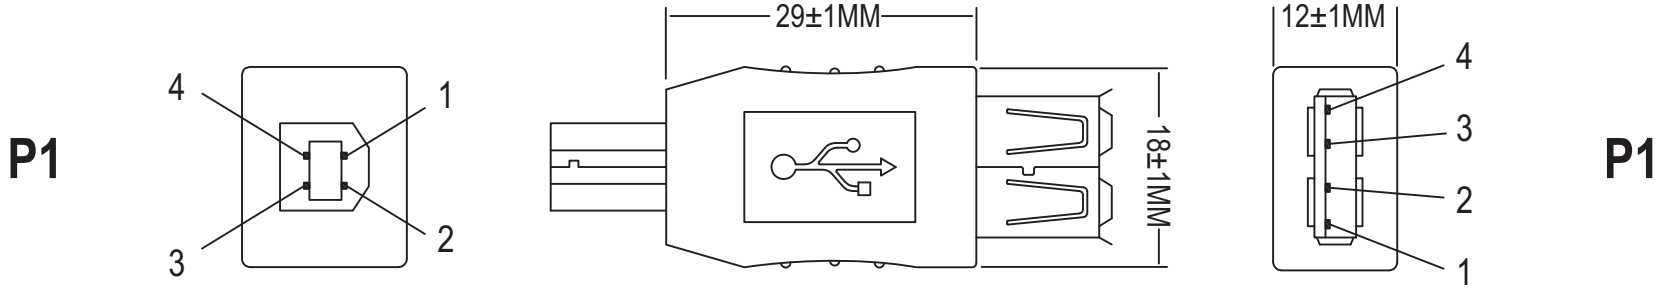



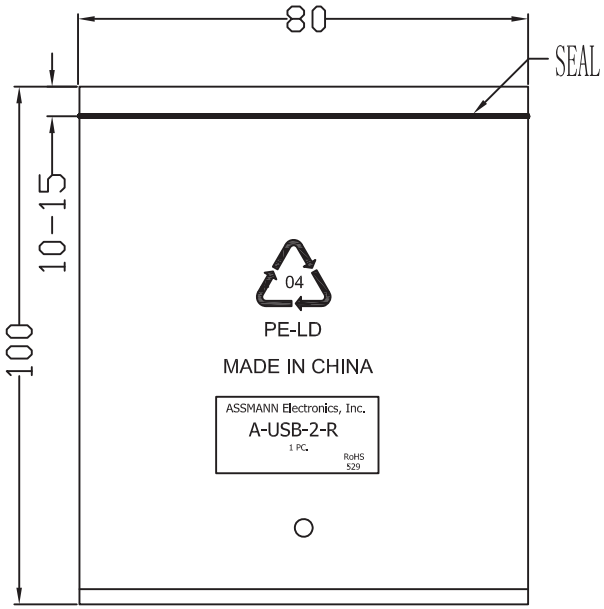

1PC/PF BAG

Material:

- Cable: UL1007 28AWG L=30MM
- P1 Connector: USB B male
  - Pin Gold Flash short body
  - Shell Plate Nickel
- P2 Connector: USB A female
  - Pin Gold Flash short body
  - Shell Plate Nickel
- Jacket: Beige 40P PVC

Electrical:

- 100% Test (Open, Short, Miss wire)
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 20MΩ Min.
- Hi-Pot: 300V DC/10ms

Unit: MM

RoHS Complaint

Scale	1:1						Name	Item No. A-USB-2-R
TOLERANCE					Drawn	10.19.11	Chappell	
X.X	±0.40				Approved			Title: USB Adapter - A type Female <=> B type Male Version 1.1 & 2.0
X.XX	±0.25							
X.XXX	±0.15							Drawing No. rev00
Angle	±3°							
			Modification	Date	Name			Replace / Sheet

ASSMANN WSW components